

34RW


Two channels receiver for lights 230VAC 500Wmax/channel

| Product Code | Frequency (MHz) | Codification | Channels | Relay Output | Vac/DC |
|--------------|-----------------|----------------|----------|--------------|--------|
| PSR-34RW | 433,92 | Keeloq Rolling | 2 | Push ON/OFF | 230 |
| PS-34RW | 433,92 | Standard | 2 | Push ON/OFF | 230 |

Functions - Connections

Power Supply 230VAC:

In terminals 1 (LIVE) , 2 (COMMON), 3 (EARTH)

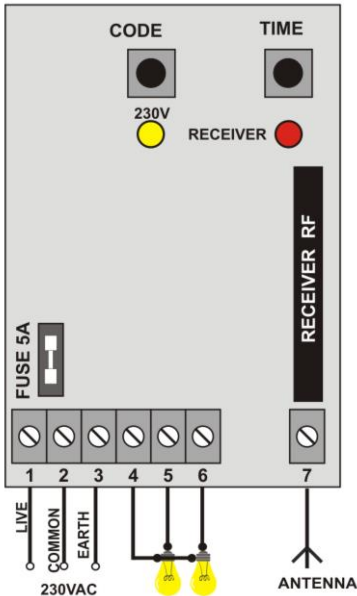

Realy Output:

1o light channel up to 500W: Live= terminal 6, Common = terminal 4

2o light channel up to 500W :Live =terminal 5, Common = terminal 4

Receiver Function:

This receiver is able to activate 2-channels lights.

It has a status memory that means that if a channel is turned on and power supply interruption (PPC) is interrupted, the receiver returns to the previous state. Maximum load up to 500W per channel. With 4-way remote control, we can install 4 independent wireless light channels. Particularly useful for controlling garden lights, activating swimming pool, electrical appliances.



Adding new transmitter in the receiver :

Press firstly the button Code and when RED indicating light goes ON leave the button. Then press the button of the transmitter you want to save. The RED indicating light flashes, the transmitter is on the

memory. Do the same procedure with the second channel, using the button TIME. The receiver accepts up to 150 transmitters per channel.

Reset the automation: Case of malfunction, please remove the power supply (230Vac) for 10 seconds, reconnect and recheck.

