


2020

Control panel for rolling shutter up to 600watt

Product code	Frequency (MHz)	Codification	External button
PSR-2020/PTR-2020	433,92/868,3	Keeloq rolling code	Yes
PS-2020	433,92	Standard	Yes
PSR-2020P/PTR-2020P	433,92/868,3	Profelmnet rolling code	Yes

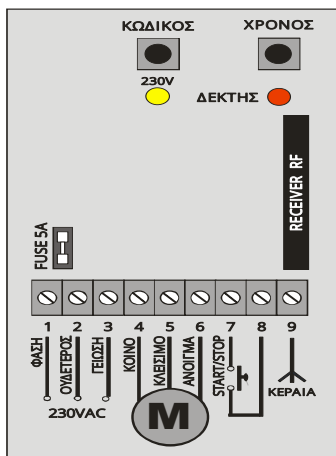

Functions

Power supply 230V:

Supply the control panel with 230V. Check that the yellow indication light is ON. Press the button of the transmitter and check the red indication light is ON.

Working time:

Adjustable from 1-180S. While the shutter is fully closed, press and keep the **TIMER** button of the controller pressed until the shutter fully open position. Then leave it. The working time is saved.

Clear Memory:

The first step is to clear the rolling code memory. Press the button **CODE** of the controller and the **RED** light goes ON after a while. Keep it pressed until the light goes off. The memory is now clear.

Adding a new transmitter with the controller button:

Press the **CODE** button and the **RED** light goes on (after a small delay). Leave it and during the next 3 seconds, press the desired transmitter channel button until the **RED** light blinks and goes OFF. The new transmitter is saved. Follow the same procedure to program more (up to 20 or 80) new transmitters.

Adding a new transmitter remotely:

The motor is stopped. Press a working transmitter button (already in memory) to start the motor working and hold it pressed until the motor stops. When it stops, leave it and press the new transmitter button immediately. The new transmitter is saved. Repeat steps to program more transmitters remotely. When the memory is full (20 or 80 transmitters) you cannot add more new transmitters.

Reset the automation: Case of malfunction, please remove the power supply (230Vac) for 10 seconds, reconnect and recheck.

Compatible transmitters: Based on the model you have, select the appropriate transmitter.

